

Blake Street Lift Station Improvements Project




PROJECT SCHEDULE:

- Construction is planned to start in Q3 2022 and be complete in Q4 2023.



PROJECT LOCATION:

- In the South Interceptor Basin, near the intersection of Blake and Hascall Streets, south of Interstate 80

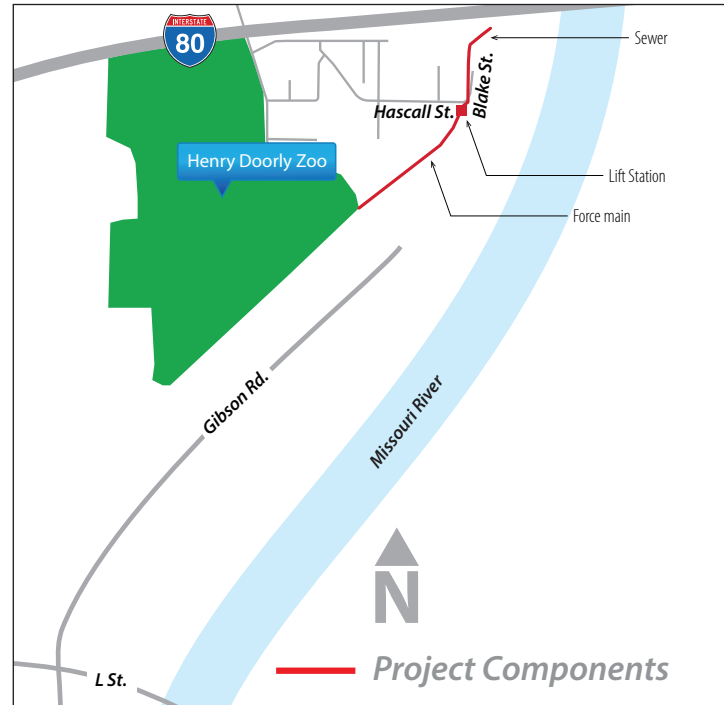

The Blake Street Lift Station Improvements Project will be a new lift station near the intersection of Hascall and Blake Streets.

The Blake Street Lift Station Improvements Project, in conjunction with the completion of the Riverview Lift Station Replacement Project, Gibson Street Sewer, and associated diversions, will allow for the decommissioning of the Martha Street and Spring Street lift stations. The new Blake Street Lift Station will have an approximate capacity of 2.0 million gallons per day (MGD) and will receive combined flows from the Martha Street and Spring Street sub-basins. The lift station will send flows to the existing Grover Street combined sewer and then to the new Riverview Lift Station Replacement Project.

Project Benefits

This project will allow for the abandonment of the Spring Street and Hickory Street Lift Stations, which have been in service for over 50 years. The Martha Street Lift Station will also be abandoned and the CSO 112 outfall will be monitored to determine if it can be eventually closed.